


Accessories

Metal stand




Enclosed pedestal (PP)

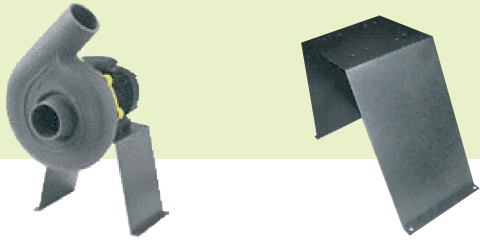

Flexible connectors (PVC) and jubilee clips in stainless steel (PVC)



Switcher 1 m (IP65)

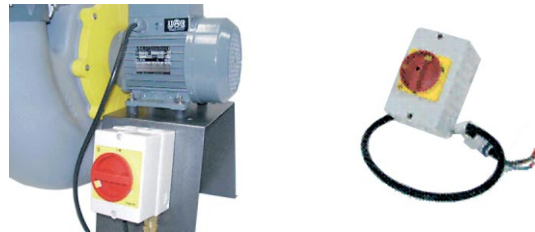


Reducers (PVC)



Dimensions (mm) - Female/female

Ø 160/200	Ø 200/250	Ø 200/315	Ø 250/315	Ø 315/400
-----------	-----------	-----------	-----------	-----------

Motorised damper (PVC), supplied only with SEAT AIRCONTROL system




2 versions available: « all or nothing, 220V or 24V input »
or « 0-10V, 24V input ».

Dimensions (mm)


Ø D	Ø 125	Ø 160	Ø 200	Ø 250	Ø 315
L	290	310	330	340	380

Adjustable damper (PVC)

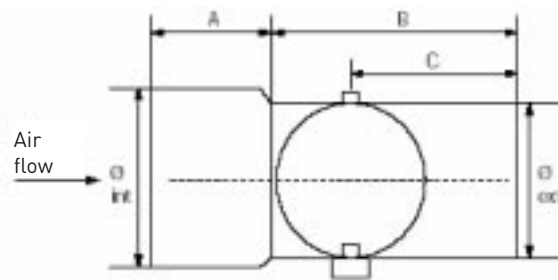


Dimensions (mm)					
Type	A	B	C	Ø int.	Ø ext.
Ø 125	60	130	80	125	125
Ø 160	60	145	90	160	160
Ø 200	60	160	100	200	200
Ø 250	60	165	100	250	250
Ø 315	60	170	100	315	315

Backdraft damper (PVC)

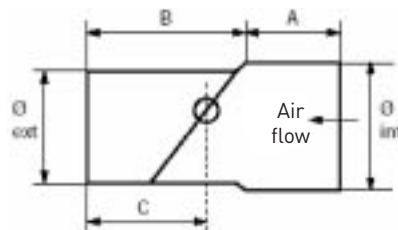

Dimensions (mm)					
Type	A	B	C	Ø int.	Ø ext.
Ø 125	60	160	110	125	125
Ø 160	60	200	130	160	160
Ø 200	60	210	140	200	200
Ø 250	60	260	170	250	250
Ø 315	60	290	180	315	315

Exhaust cap (PP)

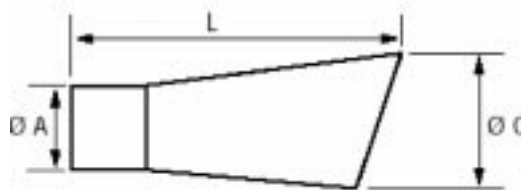

Dimensions (mm)			
Type	Ø A	L	Ø C
125	125	160	110
160	160	200	130
200	200	210	140
250	250	260	170
315	315	450	400