


STORM SERIES

STORM 14

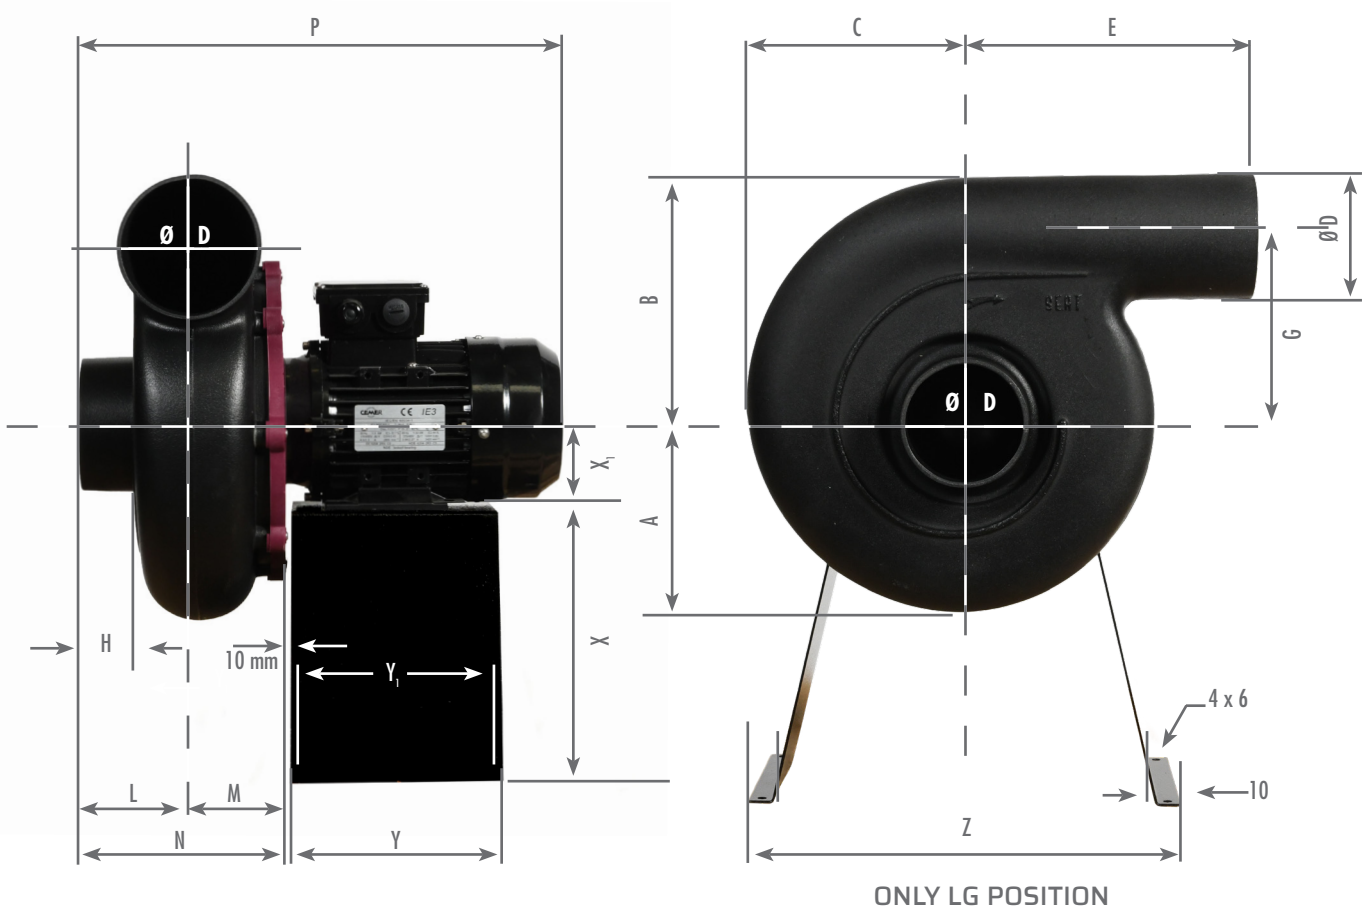

Available in 

Dimension (mm) - Metal stand not included (see accessories)															
Motor axis heights may vary according to the type of motor used															
A	B	C	ØD	E	G	H	L	M	N	P	Y	Y ₁	Z	X	X ₁
188	232	227	125	218	170	55	110	83	193	433	180	160	340	240	80

Left Rotation (Counter-Clockwise)



LG 180



LG 225



LG 270



LG 315



LG 0



LG 45



LG 90




LG 135

NOISE LEVELS


Speed (T/min)	Acoustic (dB)				Frequency Octave (Hz)							
	Qv (m ³ /h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
1725	468	418	79	59	93	84	83	76	73	66	68	56
2870	780	1155	90	70	104	95	94	87	84	77	79	67

*Acoustic pressure Lp at 3 meters - Outlet acoustic data available on request.

STORM SERIES - STORM 14

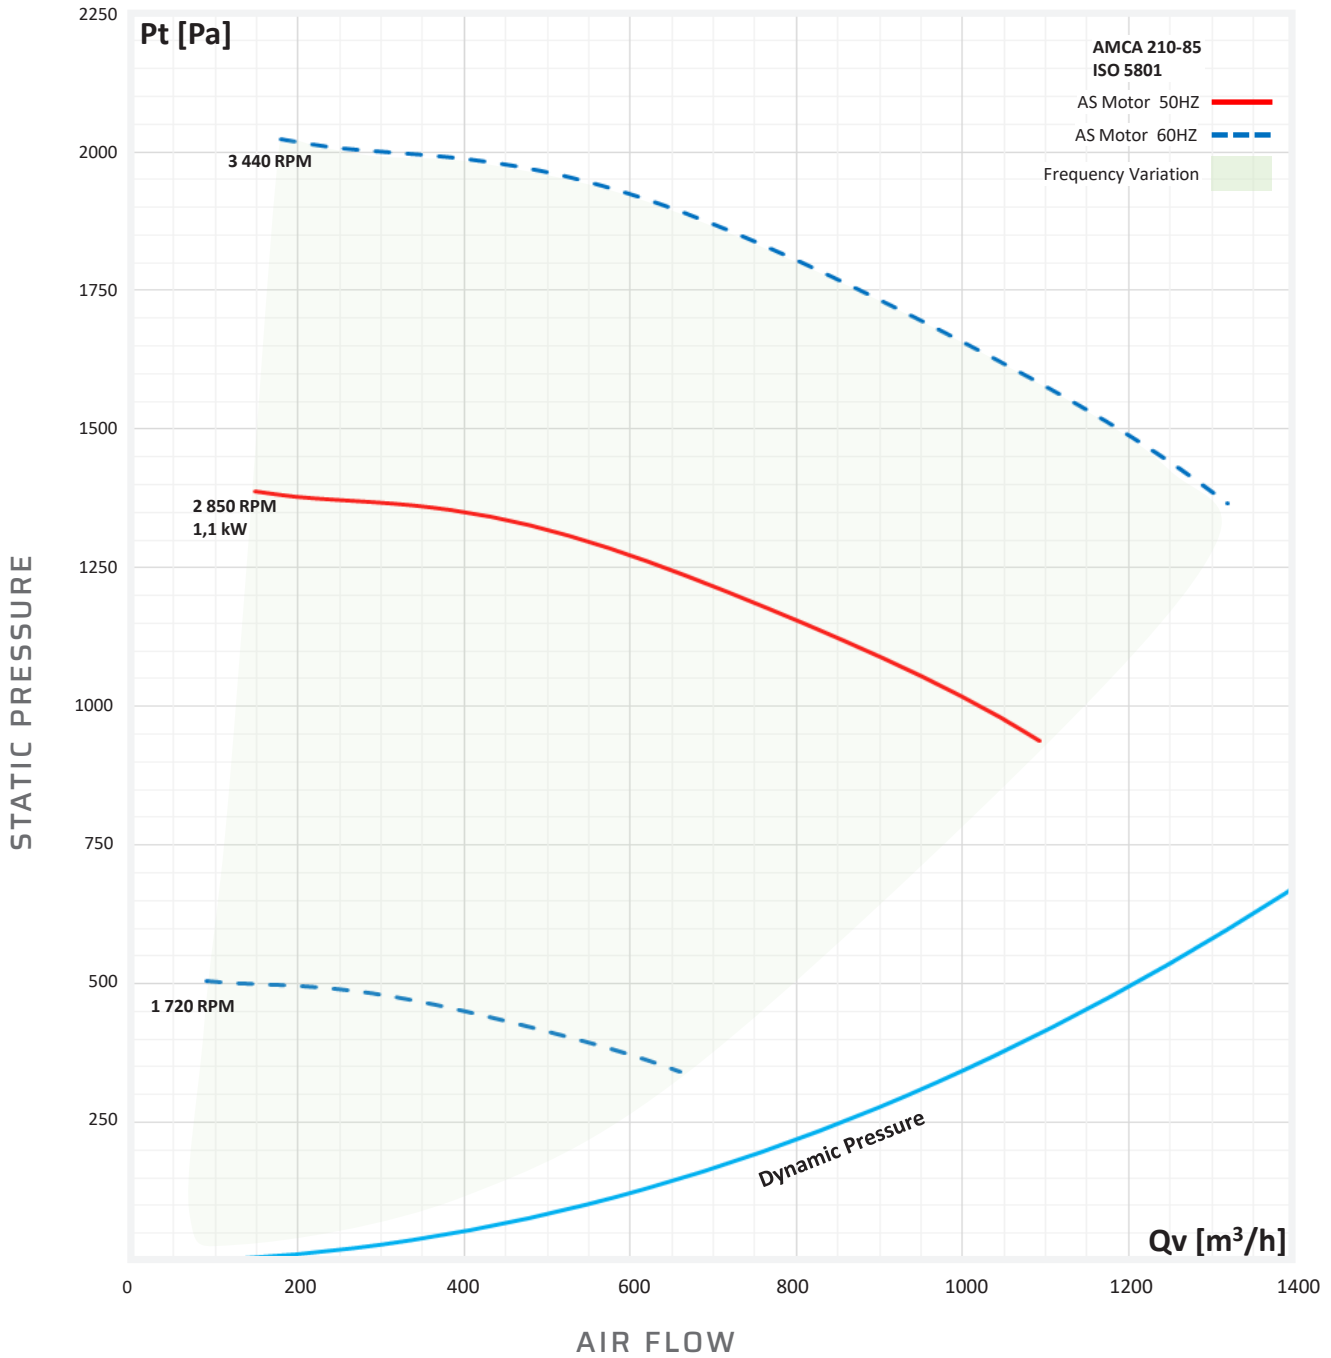

ELECTRICAL FEATURES

Motor	Power (kW)	Motor RPM	Voltage (V)	Intensity (A)	Weight (kg)	Reference Number
IP55 Asynchronous Single-Phase	1,1	2870	230	6,52	13,73	61143010
IP55 Asynchronous Three-Phase	1,1	2870	230/400	4,02/2,31	13,3	61143000
IP55 Asynchronous Three-Phase ATEX 	1,1	2870	230/400	4,5/2,6	13,2	61143003

Mandatory PTC Sensor for ATEX motor with Frequency Inverter.